

**Overture Technical Report Series
No. TR-005**

April 2013

Tutorial for Overture/VDM-RT

by

Peter Gorm Larsen

John Fitzgerald

Sune Wolff

Nick Battle

Kenneth Lausdahl

Augusto Ribeiro

Kenneth Pierce





Document history

Month	Year	Version	Version of Overture.exe
January	2010		0.1.5
March	2010		0.2
May	2010	1	0.2
February	2011	2	1.0.0
April	2013	3	2.0.0

Contents

3	Overture Tool Support for VDM-RT: an Introductory Guide	1
3.1	Introduction	1
3.2	Obtaining the Overture Tools	3
3.3	Using the Overture Perspective	4
3.4	Mapping Between UML and VDM	7
3.5	Debugging	7
3.5.1	The Debug Configuration	8
3.5.2	The Debug Perspective	8
3.5.3	Breakpoints	10
3.6	Test coverage	11
3.7	Combinatorial Testing	11
3.8	Realtime Log Viewer	13
3.9	Proof Obligations	15
3.10	A Command-Line Interface	16
3.11	Summary	19
A	A Car Navigation System Example	21
A.1	System Overview of the Car Navigation example	21
A.2	The Radio Navigation System Class	22
A.3	The MMI Class	23
A.4	The Radio Class	23
A.5	The Navigation Class	24
A.6	The Environment Task Class	24
A.7	The Insert Address Class	27
A.8	The Transmit TMC Class	28
A.9	The Volume Knob Class	28
A.10	The World Class	29
A.11	The Test Class	30

Chapter 3

Overture Tool Support for VDM-RT: an Introductory Guide

Preamble

This is an introduction to the Overture Integrated Development Environment (IDE) and its facilities for supporting modelling and analysis in VDM-RT the VDM extended language for modelling real-time systems, formerly known as VICE (VDM in Constrained Environments). Since there is not yet a book on VDM-RT it may be used as a substitute for Chapter 3 of “Validated Designs for Object-oriented Systems”¹ or as a free-standing guide. Additional material is available on the book’s web site². Throughout this guide we will refer to the textbook as “the book” and the book’s web site simply as “the web site”.

We use examples based on an *in-car navigation* case study and VDM-RT model presented in Appendix A.

We introduce the features of Overture that support the combination of formal modelling in VDM++ with object-oriented design using UML. This is done by providing a “hands-on” tour of Overture, providing enough detail to allow you to use Overture for serious applications, including the exercises in the book. However, this is by no means a complete guide to Overture³; more information can be obtained from www.overturetool.org.

3.1 Introduction

In this chapter, an in-car radio navigation system which supports the Traffic Message Channel (TMC) will be used as example.

¹John Fitzgerald, Peter Gorm Larsen, Paul Mukherjee, Nico Plat and Marcel Verhoef. *Validated Designs for Object-oriented Systems*, Springer, New York. 2005, ISBN 1-85233-881-4.

²www.vdmbook.com.

³Note that the Overture tool suite support three different VDM dialects; VDM-SL (Specification Language), VDM++ and VDM-RT (Real Time) so although this tutorial illustrate how to use Overture with VDM-RT models you will see multiple references to these dialects.



The system is composed of three main clusters of functionality;

- The Man-Machine Interface (MMI) takes care of user interaction such as handling key press input and graphical display output.
- The navigation is responsible for destination entry, route planning and turn-by-turn guidance.
- The radio is responsible for basic tuner and volume control as well as handling traffic information from the TMC.

Figure 3.1 gives an overview of the in-car navigation system.

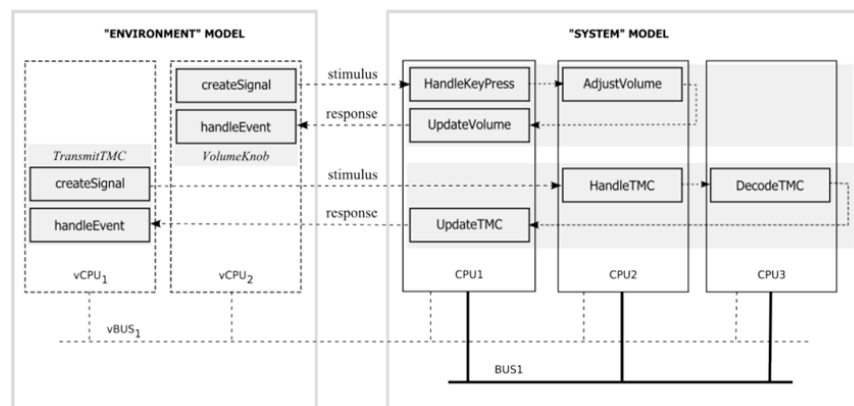


Figure 3.1: Car Navigation System Overview

The system must be able to support the following three use cases:

Change Volume: The user turns the rotary button and expects near instant audible feedback from the system. Furthermore, the visual feedback (the volume setting on the screen) should be timely and synchronized with the audible feedback.

Address Look-up: Destination entry is supported by a smart “typewriter” style interface. By turning a knob the user can move from letter to letter; by pressing it the user will select the currently highlighted letter. The map database is searched for each letter that is selected and only those letters in the on-screen alphabet are enabled that are potential next letters in the list.

TMC Message Handling: Digital traffic information is important for in-car radio navigation systems. It enables features such as automatic re-planning of the planned route in case a traffic jam occurs ahead. It is also increasingly important to enhance road safety by warning the driver, for example when a ghost driver is spotted just ahead on the planned route. TMC is such a digital traffic information service.



When developing a Real-time model, it is advised to create an object-oriented model first outside the real-time domain. This will enable the developer to focus on the structure of the system as well as eliminating any concurrency issues before moving on to the real-time domain. This proposed process is described in much more detail in [?].

The rest of this chapter has the following outline; Section 3.2 describes how to obtain the Overture tools. Section 3.3 provides an initial introduction to the terminology used by Eclipse tools like Overture. Section 3.4 shows how VDM-RT models can be connected to UML. Section 3.5 describes the process of testing and debugging VDM-RT models using Overture. Section 3.6 follows up to show how test coverage information from the testing carried out can be produced and displayed directly in a pdf document generated using the \LaTeX text processing system. Section 3.7 shows how parts of the test process can be automated using Overture's combinatorial testing feature. Section 3.8 goes on to show the Real-Time Log Viewer which gives a graphical presentation of thread execution. Section 3.9 demonstrates the automatic generation of the additional checks (called *proof obligations*) needed to ensure that a model is consistent. Finally, Section 3.10 illustrates how parts of Overture's functionality can be accessed from a command line.

3.2 Obtaining the Overture Tools

In order to run the examples and exercises presented in the book, it is necessary to install two separate tools – Overture and Modelio.

Overture: This is an open source tool, developed by volunteers and built on the Eclipse platform. The project is managed on SourceForge⁴. The best way to run Overture is to download a special version of Eclipse with the Overture functionality already pre-installed. If you go to:

`http://sourceforge.net/projects/overture/files/`

you will find pre-installed versions of Overture for Windows, Linux and Mac⁵.

Modelio: This is a tool that is both available in a commercial version as well as in an open source setting from a company called Softeam. Just like Overture this tool is built on top of the Eclipse platform. The product can be obtained from

`http://www.modelio.org/`.

A library of sample VDM-RT models, including all those needed for the exercises in the book, is available and can be downloaded from the URL⁶:

⁴`https://sourceforge.net/projects/overture/`

⁵It is planned to develop an update facility, allowing updates to be applied directly from within the Overture tools without requiring a reinstallation. However, this can be a risky process because of the dependencies on non-Overture components and so is not yet supported.

⁶The library files are created to be used with Eclipse, but can be opened with file compression programs like Winrar on Windows.



`http://overture.sourceforge.net/examples/ExamplesVDM_RT.zip`

You can import the example library zip folder as described in Section 3.3. Finally, the web site `www.vdmbook.com` contains all the examples used in this book as plain text files but these are also all present in the above mentioned zip file. Finally, in order to make use of the test coverage feature described in Section 3.6 it is necessary to have the text processing system called $\text{L}^{\text{T}}\text{E}^{\text{X}}$ and its `pdflatex` feature. This can for example be obtained from:

`http://miktex.org/2.9/`

Note for VDMTools[®] users. Overture provides a new open source VDM tool set, but it can also work in conjunction with the VDMTools[®] tool set originally developed by IFAD A/S and now maintained and developed by SCSK (see `http://www.vdmtools.jp/en/`). From Overture it is also possible automatically to transfer a project over to VDMTools.

3.3 Using the Overture Perspective

Eclipse is an open source platform based on a *workbench* that provides a common look and feel for a large collection of extension products. Thus if a user is familiar with one Eclipse-based product, it will generally be easy to start using a different product on the same workbench. The Eclipse workbench consists of several panels called *views*, such as the VDM Explorer view at the top left of Figure 3.2. A particular collection of panels designed to assist a specific activity is called a *perspective*. For example Figure 3.2 shows the standard Overture perspective which contains views for managing Overture projects, and viewing and editing files. As we shall show later, several other perspectives are available in Overture.

The *VDM Explorer view* helps you create, select, and delete Overture projects and navigate between the files in these projects. Start by importing the car navigation project from the book's web site. This can be done by right clicking the project view and selecting *Import*, followed by *General* \rightarrow *Existing Projects into Workspace*. In this way the projects from `.zip` file mentioned above can be imported very easily.

The panel to the right of the Explorer is the *editor area*. An editor customised to the dialect of VDM being used in the project will appear here.

The *Outline view*, to the right of the editor (see Figure 3.3), displays an outline of the file selected in the editor. It shows all declared classes, their instance variables, values, types, functions, operations and traces. Figure 3.2 shows the outline view on the right hand side. Clicking on an operation or function in the outline will move the cursor in the editor view to its definition. At the top of the outline view there is a button to (optionally) display the items in the outline view in alphabetical order.

The *Problems view* presents information about the projects you are working on, including warnings and error messages. In Figure 3.2 the problems view is shown at the bottom.

In the standard Overture perspective there is a *VDM Quick Interpreter* view in a pane in the same area as the problems view. This can be used for evaluation of standard VDM expressions

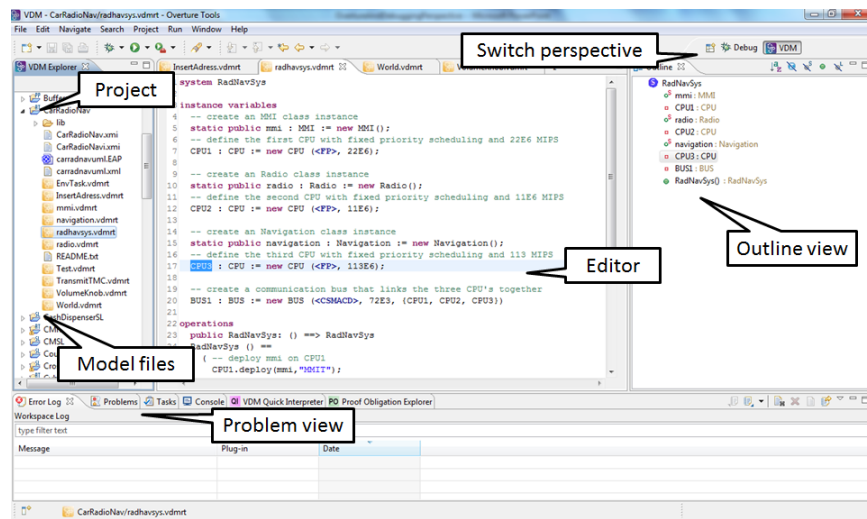


Figure 3.2: The Overture Perspective

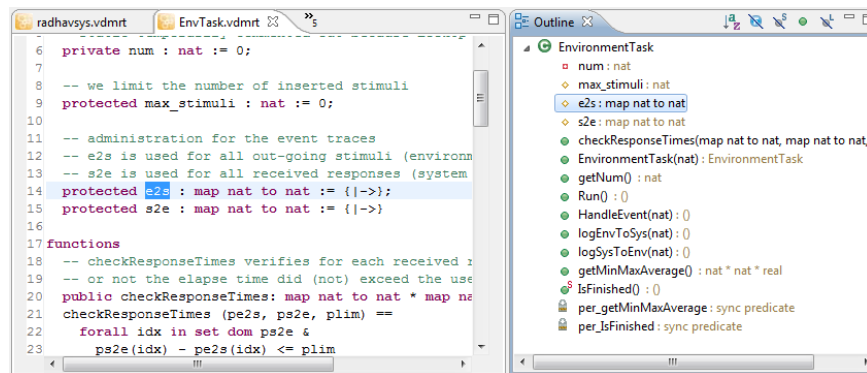


Figure 3.3: The Outline View

independent of all VDM projects incorporated in your Overture IDE. This can be very convenient to gain understanding of the different VDM operators. In Figure 3.4 it is possible to see how a couple of expressions (typed in at the box at the bottom of the view) are evaluated⁷. Note that in order to get a console where you are able to make use of definitions you need to use the console launch mode as described in Section 3.5.1 below.

Most of the other features of the workbench, such as the menus and toolbars, are similar to other Eclipse applications, though for newcomers to Eclipse it is worth noting that there is a special menu with Overture-specific functionality. One convenient feature is a toolbar of shortcuts to switch between different perspectives that appears on the right side of the screen; these vary dynamically

⁷If errors appear in this evaluation the current version of the Overture IDE simply yield a `Fatal` error where it is anticipated that later releases will provide more helpful run-time errors to the users.

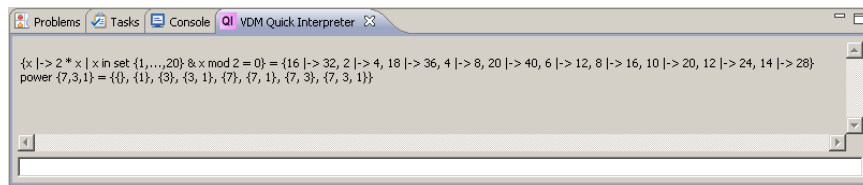


Figure 3.4: The VDM quick interpreter view

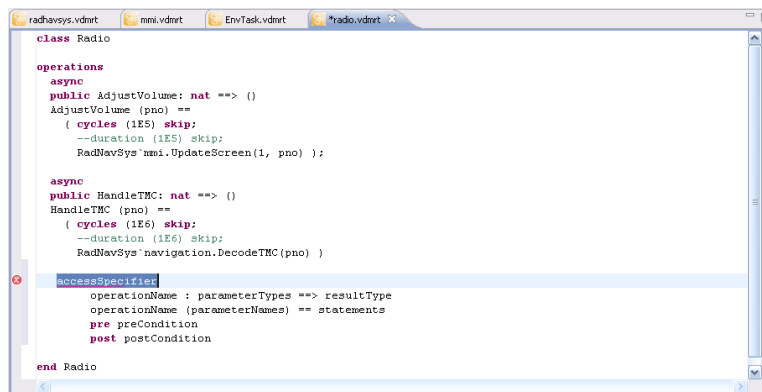


Figure 3.5: Explicit operation template

according to context and history.

When making corrections to the model, you can use the Overture IDE templates. When you hit the key combination *CTRL+space* after entering the initial characters of the template needed, Overture will offer possible completions. For example, if you type "op" followed by *CTRL+space*, Overture will propose the use of an implicit or explicit operation template.

The Overture IDE supports many templates for language constructs including cases statements, classes, quantified expressions, functions (explicit/implicit), operations (explicit/implicit) and many more⁸. Further templates can easily be added in the future. The use of templates makes it more convenient to write VDM models without detailed prior knowledge of the language syntax.

When editing a VDM model, the Overture IDE parses the content of the editor buffer continuously as changes are made. If there are any syntax errors, these will be reported in the problems view, as well as being highlighted in the editor. See the bottom of Figure 3.2. Each time a VDM-RT model file is saved the editor type checks the model and reports any errors or warnings. Note also that the suggestions made about missing characters in the error messages may not always be entirely the action you may wish to take when correcting the source since the tool cannot guess what you intended to write.

⁸It is possible to see and enhance the complete list of these by selecting *Window → Preferences → VDM → Templates*.



3.4 Mapping Between UML and VDM

In order to map the UML class diagram created in Modelio to VDM, a new project must be created in the Overture IDE to receive it. This is done by right-clicking in the *VDM Explorer* view, and creating a new VDM-RT project and for example naming it `CarRadioNavUML`. If the desired language dialect (say a VDM-RT project) is not directly available in the right-click menu, please choose *Project* or *Other* and browse to the VDM-RT project. By right-clicking the new project root in the *VDM Explorer*, *UML Transformation* can be chosen, followed by *Import XMI*. Now browse to the XMI/XML file exported from Modelio called `carradnavuml.uml` and open this.

It is possible to automatically transform all the classes from the car radio navigation project to UML. To do this, simply right click the project root and choose *UML Transformation* → *Export XMI* (i EMF UML3.0.0 format som `.uml` format). The UML/XMI file can subsequently be imported in Modelio, enabling the user to get an overview of the complete model.

Note that state charts, activity diagrams, sequence diagrams, objects charts, package charts are not used in the UML mapping. It is essentially only the information used statically inside classes and their usage in class diagrams that is used.

3.5 Debugging

This section describes how to debug a model by testing it using the Overture IDE. The model can be exercised by running the operations *RunScenario1* or *RunScenario2* in the *World* class:

```

class World

types

public perfddata = nat * nat * real

instance variables

static public envTasks : map seq of char
                        to EnvironmentTask := {|->};

operations

addEnvironmentTask: seq of char * EnvironmentTask ==> ()
addEnvironmentTask (pnm, penv) ==
( envTasks := envTasks munion { pnm |-> penv };
  penv.Run() );

public RunScenario1 : () ==> map seq of char
                        to perfddata

```



```
RunScenario1 () ==
( addEnvironmentTask("VolumeKnob",
                    new VolumeKnob(10));
  addEnvironmentTask("TransmitTMC",
                    new TransmitTMC(10));
  return { name |-> envTasks(name).getMinMaxAverage()
          | name in set dom envTasks } );
...
end World
```

3.5.1 The Debug Configuration

Before you start to debug a model in Overture, you need to set up a *debug configuration*. Right click the project and choose *Debug As* → *Debug configuration*. The debug configuration dialog have 3 different launch modes:

Entry Point: This is the standard Eclipse approach where one decides before debugging which operation/function to call.

Remote Console: This is an advanced option that enables remote control of the interpreter and this is described in the Overture user manual [?].

Console: This will simply start up a console where the user interactive can debug different operations/functions defined in the selected project⁹.

Here we will start with using the traditional Eclipse approach with an “Entry Point” launch configuration which requires the project name, the class, the operation/function used as the entry point of the test and the source file containing the entry point definition. As an example, Figure 3.6 shows the debug configuration for the car navigation model. The class and operation/function name can be chosen from a Browse dialog. If the operation or function has arguments, these must be typed in manually between the brackets of the entry point function/operation.

Once the configuration is ready, the model can be debugged. The Overture IDE will change to the *Debug perspective* which contains the views needed for debugging in VDM. Breakpoints can easily be set by double clicking in the left margin of the editor view. When the debugger reaches a breakpoint, evaluation suspends and the user can inspect the values of different variables and step through the VDM model line by line.

3.5.2 The Debug Perspective

The Debug perspective is illustrated on figure 3.7 The *Debug view* in the upper left corner of the

⁹For VDMTools users this will be a familiar console corresponding to a VDM model that has been initialised in VDMTools’ interpreter.

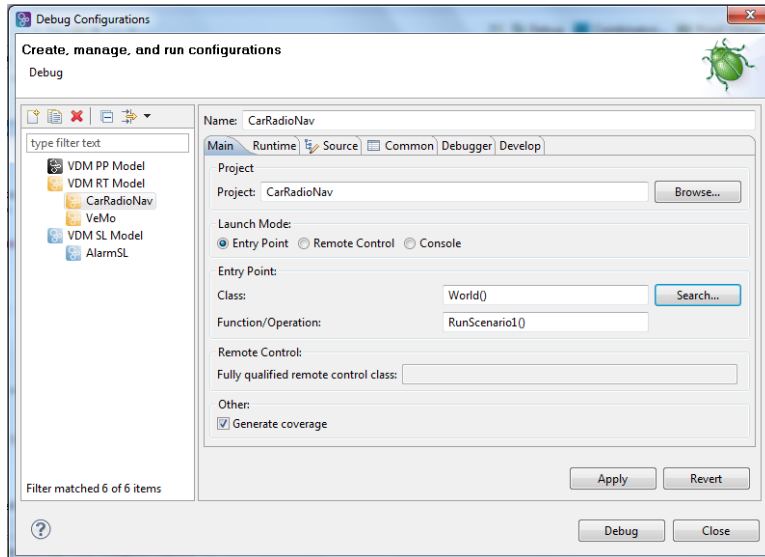


Figure 3.6: The debug configuration dialog

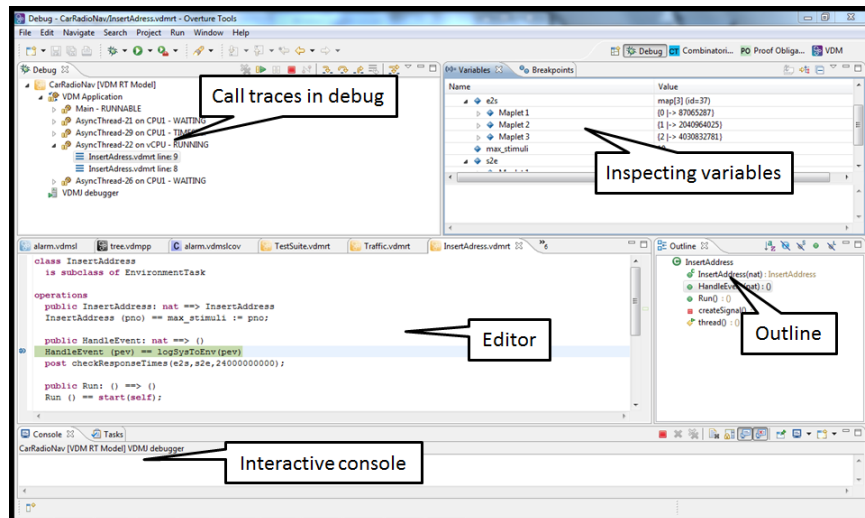









Figure 3.7: Debugging perspective



Table 3.1: Overture debugging buttons

Button	Explanation
	Resume debugging
	Suspend debugging
	Terminate debugging
	Step into
	Step over
	Step return
	Use step filters

Debug perspective shows all running models and their call stacks. It also shows whether a given model is stopped, suspended or running. All threads are also shown, along with their running status. It is possible to switch between threads from the Debug view.

At the top of the view are standard Eclipse buttons (see Table 3.1) for controlling debugging, allowing you to stop, step into, step over and resume.

The *Variables view* in the upper right corner of the Debug perspective shows all the variables in a given context, when a breakpoint is reached. The variables and their displayed values are automatically updated when stepping through a model.




Figure 3.8: Breakpoint View

3.5.3 Breakpoints

The *Breakpoints view* gives an overview of all breakpoints set (see Figure 3.8). From this view the user can easily navigate to the location of a given breakpoint, disable or delete them, or set their properties.

The *Expressions view* allows the user to enter *watch* expressions whose values are automatically displayed and updated when stepping. Watch expressions can be added manually or created by selecting *create watch expression* from the Variables view. It is possible to edit existing expressions. Like the Breakpoints view, this view is hidden in the upper right hand corner in Figure 3.7.



3.6 Test coverage

It is often useful to know how much of a model has been exercised by a set of tests¹⁰. This gives some insight into the thoroughness of a test suite and may also help to identify parts of the model that have not been assessed, allowing new tests to be devised to cover these. When any evaluation is performed on a VDM-RT model, the interpreter records the lines of the VDM-RT model that are executed. This permits the line coverage to be examined after a test to identify the parts of the VDM++ model that have not yet been exercised – coverage is cumulative, so a set of tests can be executed and their total coverage examined at the end.

In our simple example, the different tests in the exercise above does cause the majority of the VDM-RT model to be executed, but for demonstration purposes let us start by cleaning the model (right click on the project and select `Clean`). Let us evaluate the `RunScenario1` and `RunScenario2` operations where the `Generate coverage` option is selected. Remember that whenever test coverage information is desired the `Generate Coverage` option must be selected as shown in Figure 3.6. Once the debugger has completed and the result is written out in the `console` it is possible to right click on the `CarRadioNavi` project and select the `Latex` → `Latex coverage` the coverage information that have been gathered in any expressions that have been debugged since the last change to a file have been saved or the project have been cleaned will be turned into a pdf file. The `CarRadioNavi.pdf` file is placed in the `generated/latex` directory. Note that whenever the model is adjusted or it is cleaned so it gets type checked again all the files in the `generated` directory are deleted.

The coverage information is provided in a way where uncovered expressions are shown in red in the generated pdf file. In addition after the content of each VDM-RT source file a table with coverage overview is provided in tabular form. So for example for the `MMI` class this looks like:

Function or operation	Coverage	Calls
<code>HandleKeyPress</code>	90.0%	36
<code>UpdateScreen</code>	87.0%	65
<code>mmi.vdmrt</code>	88.0%	101

where the `ExpertIsOnDuty` and `ExpertToPage` operations are fully covered by just one call (due to the fact that its body is simply one line) whereas the `PlantInv` operation is called twice¹¹.

3.7 Combinatorial Testing

The previous sections have shown how to manually test and debug models that use an executable subset of VDM-RT. However, Overture also contains a feature enabling more automation in the testing process. It is possible to write regular expressions, as *traces*, that one would like to expand

¹⁰Note that this feature is not yet supported for models using unicode characters such a Japanese identifiers.

¹¹Note that the coverage from the combinatorial testing feature described in Section 3.7 is not taken into account in the current version of the Overture IDE, but this will be enabled in a later release.



into a large set of individual tests. When new traces are incorporated in a VDM project you may need to press the **Refresh** button (🔄) in the *CT Overview* view.

In order to illustrate how this can be used, we have introduced a `Test` class which only in introduced in this example for illustration purposes.

In order to do the automation, Overture needs to know about the combinations of operation calls that you would like to have carried out, so it is necessary to write a kind of regular expression called a *trace*. VDM-RT has been extended such that traces can be written directly as a part of a VDM-RT model. In our case, inside the `Test` class one can find:

```
traces

TT: let x in set {1,2,3}
    in
      ((mmi.HandleKeyPress(x,x) |
        mmi.UpdateScreen(x,x) |
        radio.AdjustVolume(x) |
        radio.HandleTMC(x) |
        nav.DatabaseLookup(x) |
        nav.DecodeTMC(x));
      EnvironmentTask`IsFinished())
```

The let-be statements in the trace called `TT` yield all possible combinations of the variable bindings to `x` (whereas manual debugging will select an arbitrary binding here). This is followed by the call of 6 different operations separated by an alternative operator (`|`). The selected `x` value is then used as argument `t` each of these operations so in total this generates 18 (3 times 6) test cases. Inside this combinatorial testing view you can select the `CarRadNav` project, right click it and choose the **Full Evaluation** option as shown in Figure 3.9. Now Overture expands and executes all 18 test cases one after each other. The results of these executions are illustrated with green check marks and red crosses, meaning that the tests passed or failed respectively (see Figure 3.10). Note that in the Combinatorial Testing perspective, the view in the lower region is able to show the individual steps of a selected test case, along with the corresponding results from its four operation calls.

Note that here `IsFinished` have been defined in the `EnvironmentTask` class as:

```
public static IsFinished: () ==> ()
IsFinished() == skip;

sync

per IsFinished => #fin(logSysToEnv) > 0;
```

This is necessary because the operations being tested are all defined as being asynchronous and thus



the execution would complete before the system had a change to do its work if the `IsFinished` operation was not used.




Figure 3.9: Invoking the combinatorial testing feature

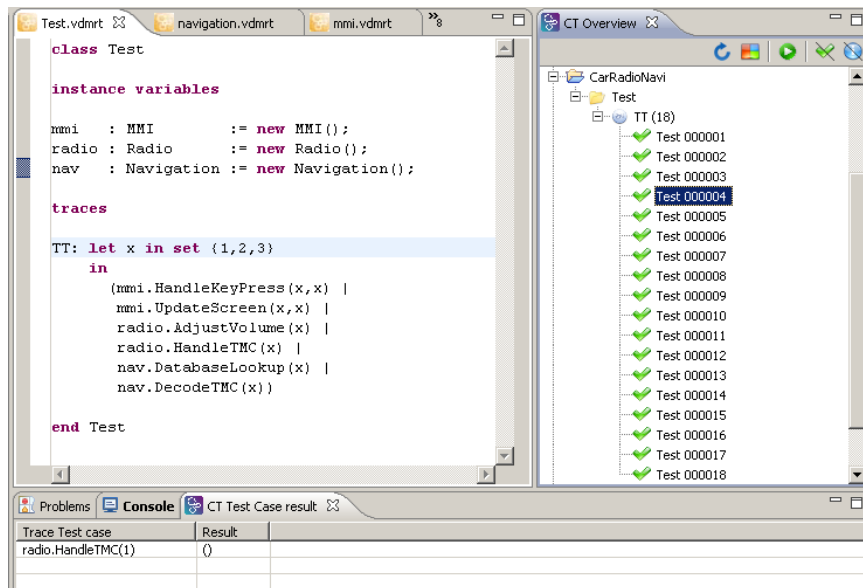


Figure 3.10: Using Combinatorial Testing for the Radio Navigation VDM-RT model

The syntax for traces also enables operation sequencing and repetition to be specified, but these were not needed for this simple case. Using the full power of traces it is possible to efficiently generate and execute very large test suites. Naturally, this is most likely to find inconsistencies when the model attempts to define its essential predicates (invariants, pre and post-conditions).

3.8 Realtime Log Viewer

When a VDM-RT model is being executed a textual logfile with information about the time of the generation is created in a folder called "generated/logs/debugconfig" with the *.logrt* extension. Note that `debugconfig` here will be the name of the launch configuration that the



user have created so if several launch configurations are used these will be separated in different directories. This logfile can be viewed in the build-in RealTime Log Viewer, by double-clicking the file in the project view. The viewer allows you to explore system execution in different ways. In Figure 3.11 the architectural overview of the system is given, describing the distributed nature of the model.

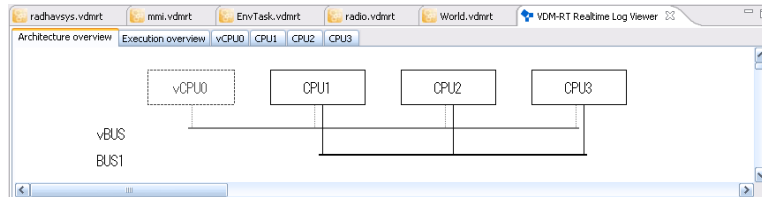


Figure 3.11: Architectural overview

The RealTime Log Viewer also enables the user to get an overview of the model execution on a system level – this can be seen in Figure 3.12. This view shows how the different CPUs communicate via the BUSES of the system.



Figure 3.12: Execution overview

Since the complete execution of the model cannot be shown in a normal sized window, you have the option of jumping to a certain time using the *Go to time* button. It is also possible to export all the generated views to *JPG* format using the *Export Image* button. All the generated pictures will be placed in the "log" folder.

In addition to the execution overview, the RealTime Log Viewer can also give an overview of all executions on a single CPU. This view gives a detailed description of all operations and functions invoked on the CPU as well as the scheduling of concurrent processes. This can be seen in Figure 3.13.

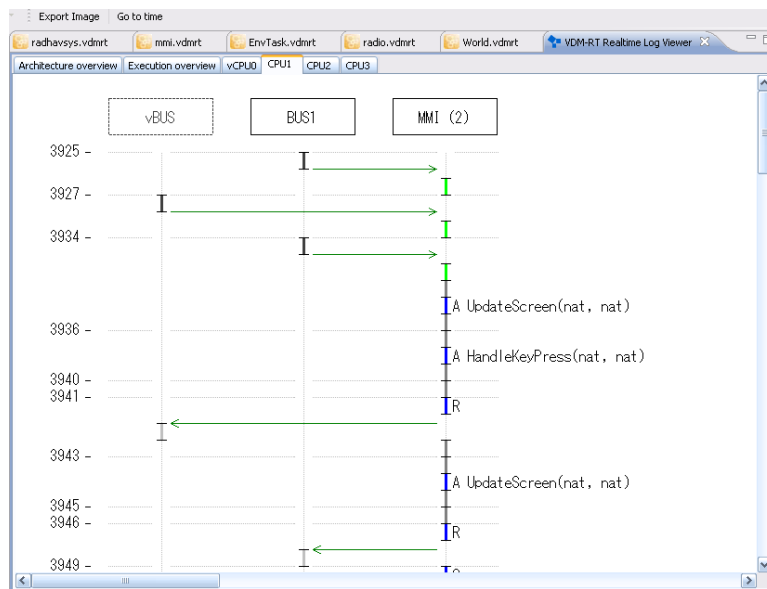


Figure 3.13: Execution on single CPU

3.9 Proof Obligations

The Overture tool is also able to generate *Proof Obligations* automatically for VDM-RT models. Proof obligations are boolean expressions that describe constraints to be met at various points in the model in order to ensure that the model is internally consistent (i.e. no run-time errors will occur while debugging if these are all satisfied). Proof obligations are generated to ensure, for example, that operations will always respect invariants on instance variables. Each proof obligation generated from a model should evaluate to *true*.

The proof obligation generator is invoked by right clicking on the project in the *Explorer view* and then selecting the *Proof Obligations -> Generate Proof Obligations* entry. This will start up a proof obligation perspective with a special *PO view*. For the alarm example this view takes the form shown in Figure 3.14.

One of the first proof obligations listed for this example is related to the `RunScenario1` operation, which is defined as:

```
public RunScenario1 : () ==> map seq of char to perfdata
RunScenario1 () ==
  (addEnvironmentTask("VolumeKnob", new VolumeKnob(10));
   addEnvironmentTask("TransmitTMC", new TransmitTMC(10));
   return { name |-> envTasks(name).getMinMaxAverage()
           | name in set dom envTasks } );
```

The proof obligation records the constraint that the mapping application `envTasks(name)`

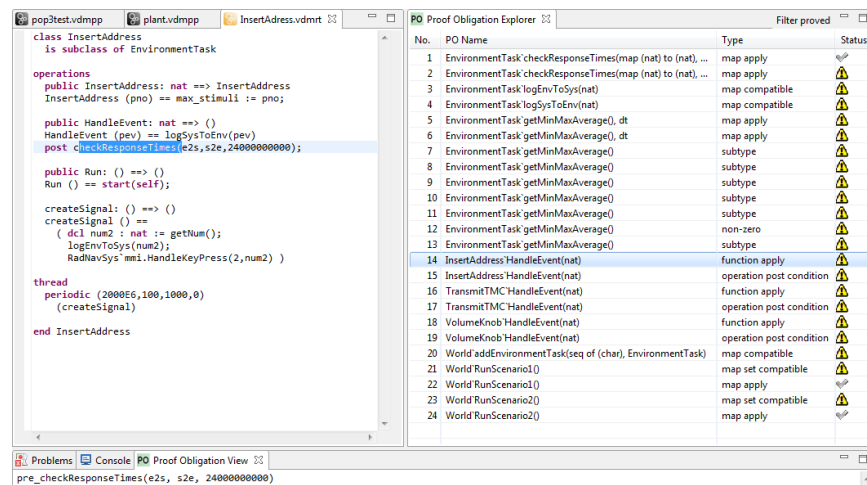


Figure 3.14: The Proof Obligation view for the Car Navigation VDM-RT model

is indeed defined (i.e. that the name is in the domain of the mapping `envTasks`). This is described as a proof obligation in the following form:

```
forall name in set (dom envTasks) &
  name in set dom envTasks
```

Proof obligations represent checks that should be made on a model in order to gain confidence in its consistency. At present, proof obligations have to be checked by manual inspection of the model code. Tools are being developed for Overture to check as many as possible of the proof obligations automatically, but there are always likely to be some that have to be checked manually.

3.10 A Command-Line Interface

So far only the graphical user interface of Overture has been presented but the core of Overture also provides a simple command line interface. This is useful for the automatic batch execution of tests, though the command line also provides a full set of interactive execution and debugging commands which can be useful when examining batch tests.

Overture is written in Java, and so to run it from the command line, the Overture jar file¹² should be executed with a Java JRE (version 7 or later):

```
java -jar Overture-2.0.0.jar
```

¹²See the Overture documentation at sourceforge.net/projects/overture for the location of the jar file or use the script or windows bat file incorporating this.



If the jar file is executed with no further options like this, it will print a list of available options and exit. The most important option is the VDM dialect that the tool should use. In the case of our alarm example, we want to use VDM-RT for which the option is `-vdmrt`. After this, we can simply specify the names of the VDM-RT model files to load, or the name of a directory in which all the files reside:

```
java -jar Overture-2.0.0.jar -vdmrt CarNaviRadio
```

That will perform a syntax and type check of all the VDM-RT model files in the directory called `CarNaviRadio`, producing any errors and warning messages on the console, before terminating:

```
Parsed 10 classes in 0.187 secs. No syntax errors
Type checked 12 classes in 0.094 secs. No type errors
```

In the case of our example, there are no syntax or type checking errors. Warnings can be suppressed using the `-w` option.

If a VDM-RT model has no type checking errors, it can either be given an expression to evaluate as an option on the command line, or the user can enter an interactive mode to evaluate expressions and debug their execution.

To evaluate an expression from the command line, the `-e` option is used, followed by a VDM expression to evaluate. You may also find the `-q` option useful, as this suppresses the informational messages about the parsing and type checking:

```
java -jar Overture-2.0.0.jar -vdmrt -w -q -e
    "new World().RunScenario1()" CarNaviRadio
```

This produces a single line of output for the evaluation, since the parsing and checking messages are suppressed, as are the warnings:

```
{"TransmitTMC" |-> mk_(118187598, 118187598, 118187598),
 "VolumeKnob" |-> mk_(36490730, 140915746, 6.2612283777777776E7)}
```

Clearly a batch of test evaluations could be performed automatically by running a series of similar commands and saving the output results for comparison against expected results.

To run the command line interpreter interactively, the `-i` command line option must be given. Instead of terminating after the type check, this will cause Overture to enter its interactive mode, and give the interactive `>` prompt:

```
Parsed 10 classes in 0.172 secs. No syntax errors
Type checked 12 classes in 0.14 secs. No type errors
Initialized 12 classes in 0.109 secs.
```



```
Interpreter started
>
```

From this prompt, various interactive commands can be given to evaluate expressions, debug their evaluation, or examine the VDM-RT model environment. The `help` command lists the commands available. The `quit` command leaves the interpreter.

For example, the following session illustrates the creation of a test object, followed by an evaluation of its `RunScenario2` operation, and a debug session with a breakpoint at the start of the same operation:

```
> create world := new World()
> p world.RunScenario2()
= {"InsertAddress" |-> mk_(71646789, 71646789, 71646789),
   "TransmitTMC" |-> mk_(118187598, 118187598, 118187598)}
Executed in 0.655 secs.

> break World`addEnvironmentTask
Created break [1] in 'World' (CarNaviRadio\World.vdmrt)
at line 12:5
12:      ( envTasks := envTasks munion { pnm |-> penv };

> p world.RunScenario2()
Stopped break [1] in 'World' (CarNaviRadio\World.vdmrt)
at line 12:5
12:      ( envTasks := envTasks munion { pnm |-> penv };
[MainThread-164]> print penv
penv = InsertAddress{#77, max_stimuli:=10, e2s:={|->},
  s2e:={|->},EnvironmentTask{#76, max_stimuli:=10, num:=0,
  e2s:={|->},s2e:={|->}}}
[MainThread-164]> continue
Runtime: Error 4021: Duplicate map keys have different
values:
   "InsertAddress" in 'World' (CarNaviRadio\World.vdmrt)
at line 12:28
Stopped in 'World' (CarNaviRadio\World.vdmrt)
at line 12:28
12:      ( envTasks := envTasks munion { pnm |-> penv };
```

Notice that the `print` command is available at the breakpoint to examine the runtime state of the system. In the example, we show the value of the `penv` variable. Continuing from this point, the VDM-RT model raises a runtime error because the previous execution's results are still in the



(static) `envtasks` map. The VDM-RT model can be re-initialized between runs with the `init` command to avoid this.

The `help` command is context sensitive, and will list the extra debugging commands available at a breakpoint, such as `continue`, `step`, `stack`, `list` and so on. The full set of commands is described in the Overture User Guide¹³.

3.11 Summary

This chapter has introduced the following major features of tool support for VDM-RT:

- syntax checking of VDM-RT models;
- type checking of VDM-RT models;
- executing and debugging VDM-RT models;
- combinatorial testing enabling automation of parts of the testing process;
- proof obligation generation and
- a command-line interface enabling access to test coverage.

¹³Supplied with the Overture documentation.



Appendix A

A Car Navigation System Example

This section presents the requirements for a in-car radio navigation system which supports the Traffic Message Channel (TMC). It forms a running example that serves to illustrate the process described earlier and to introduce elements of the VDM++ modelling language with the Real-time extension VICE. Although the modelling process is described here as though it were a single-pass activity, a real development would usually be iterative.

A.1 System Overview of the Car Navigation example

Figure A.1 provides an overview of the `World` class and the environment classes.

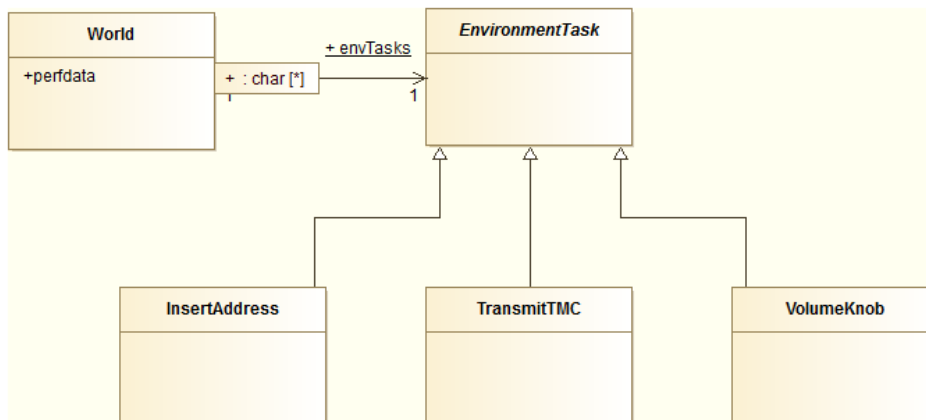


Figure A.1: Overview of the World and Environment Classes



A.2 The Radio Navigation System Class

The RadNavSys class is the system class that all VDM-RT models must include.

```
system RadNavSys

instance variables
  -- create an MMI class instance
  static public mmi : MMI := new MMI();
  -- define the first CPU with fixed priority
  -- scheduling and 22E6 MIPS
  CPU1 : CPU := new CPU (<FP>, 22E6);

  -- create an Radio class instance
  static public radio : Radio := new Radio();
  -- define the second CPU with fixed priority
  -- scheduling and 11E6 MIPS
  CPU2 : CPU := new CPU (<FP>, 11E6);

  -- create an Navigation class instance
  static public navigation : Navigation := new Navigation();
  -- define the third CPU with fixed priority
  -- scheduling and 113 MIPS
  CPU3 : CPU := new CPU (<FP>, 113E6);

  -- create a communication bus that links the three
  -- CPU's together
  BUS1 : BUS := new BUS (<CSMACD>, 72E3, {CPU1, CPU2, CPU3})
```

operations

```
public RadNavSys: () ==> RadNavSys
RadNavSys () ==
  ( -- deploy mmi on CPU1
    CPU1.deploy(mmi, "MMIT");
    CPU1.setPriority(MMI `HandleKeyPress, 100);
    CPU1.setPriority(MMI `UpdateScreen, 90);
    -- deploy radio on CPU2
    CPU2.deploy(radio, "RadioT");
    CPU2.setPriority(Radio `AdjustVolume, 100);
    CPU2.setPriority(Radio `DecodeTMC, 90);
    -- deploy navigation on CPU3
```



```

    CPU3.deploy(navigation, "NavT");
    CPU3.setPriority(Navigation`DatabaseLookup, 100);
    CPU3.setPriority(Navigation`DecodeTMC, 90)
    -- starting the CPUs and BUS is implicit
  );
end RadNavSys

```

A.3 The MMI Class

```

class MMI

operations
  async
  public HandleKeyPress: nat * nat ==> ()
  HandleKeyPress (pn, pno) ==
    ( cycles (1E5) skip;
      cases (pn):
        1 -> RadNavSys`radio.AdjustVolume(pno),
        2 -> RadNavSys`navigation.DatabaseLookup(pno)
      end );

  async
  public UpdateScreen: nat * nat ==> ()
  UpdateScreen (pn, pno) ==
    ( cycles (5E5) skip;
      cases (pn):
        1 -> World`envTasks("VolumeKnob").HandleEvent(pno),
        2 -> World`envTasks("InsertAddress").HandleEvent(pno),
        3 -> World`envTasks("TransmitTMC").HandleEvent(pno)
      end )

end MMI

```

A.4 The Radio Class

```

class Radio

```



```
operations
  async
  public AdjustVolume: nat ==> ()
  AdjustVolume (pno) ==
    ( cycles (1E5) skip;
      RadNavSys `mmi.UpdateScreen(1, pno) );

  async
  public HandleTMC: nat ==> ()
  HandleTMC (pno) ==
    ( cycles (1E6) skip;
      RadNavSys `navigation.DecodeTMC(pno) )

end Radio
```

A.5 The Navigation Class

```
class Navigation

operations
  async
  public DatabaseLookup: nat ==> ()
  DatabaseLookup (pno) ==
    ( cycles (5E6) skip;
      RadNavSys `mmi.UpdateScreen(2, pno) );

  async
  public DecodeTMC: nat ==> ()
  DecodeTMC (pno) ==
    ( cycles (5E5) skip;
      RadNavSys `mmi.UpdateScreen(3, pno) )

end Navigation
```

A.6 The Environment Task Class



```

class EnvironmentTask

instance variables
  -- use a unique identifier for each generated event
  private num : nat := 0;

  -- we limit the number of inserted stimuli
  protected max_stimuli : nat := 0;

  -- administration for the event traces
  -- e2s is used for all out-going stimuli
  -- (environment to system)
  -- s2e is used for all received responses
  -- (system to environment)
  protected e2s : map nat to nat := {|->};
  protected s2e : map nat to nat := {|->}

functions
  -- checkResponseTimes verifies for each received response
  -- whether or not the elapse time did (not) exceed the
  -- user-defined limit
  public checkResponseTimes: map nat to nat *
                          map nat to nat * nat -> bool
  checkResponseTimes (pe2s, ps2e, plim) ==
    forall idx in set dom ps2e &
      ps2e(idx) - pe2s(idx) <= plim
  -- the responses received should also be sent
  pre dom ps2e inter dom pe2s = dom ps2e

operations
  public EnvironmentTask: nat ==> EnvironmentTask
  EnvironmentTask (pno) == max_stimuli := pno;

  public getNum: () ==> nat
  getNum () ==
  ( dcl res : nat := num;
    num := num + 1;
    return res );

  -- Run shall be overloaded to implement the event generation
  -- loop towards the system. typically, it starts a periodic

```



```
-- thread
public Run: () ==> ()
Run () == is subclass responsibility;

public HandleEvent: nat ==> ()
HandleEvent (pev) == is subclass responsibility;

-- logEnvToSys is used to register when an event was inserted
-- into the system. Note that the 'time' keyword refers to
-- the internal simulation wall clock of Overture
public logEnvToSys: nat ==> ()
logEnvToSys (pev) == e2s := e2s munion {pev |-> time};

-- logSysToEnv is used to register when an event was received
-- from the system. Note that the 'time' keyword refers to the
-- internal simulation wall clock of Overture
public logSysToEnv: nat ==> ()
logSysToEnv (pev) == s2e := s2e munion {pev |-> time};

-- getMinMaxAverage calculates the minimum, maximum and
-- average response times that were observed during execution
-- of the model note that getMinMaxAverage is blocked until
-- the number of system responses is equal to the number of
-- sent stimuli termination is ensured because only a maximum
-- number of stimuli is allowed to be inserted in the system,
-- so eventually all stimuli can be processed by the system.
-- This method only works when each stimulus leads to exactly
-- one response, which is the case in this instance.
public getMinMaxAverage: () ==> nat * nat * real
getMinMaxAverage () ==
  ( dcl min : [nat] := nil,
    max : [nat] := nil,
    diff : nat := 0;
  for all cnt in set dom s2e do
    let dt = s2e(cnt) - e2s(cnt) in
      ( if min = nil then min := dt
        else (if min > dt then min := dt);
        if max = nil then max := dt
          else (if max < dt then max := dt);
          diff := diff + dt );
    return mk_(min, max, diff / card dom s2e) )
```



```

public static IsFinished: () ==> ()
IsFinished() == skip;

sync
  -- getNum is mutually exclusive to ensure unique values
  mutex (getNum);
  -- getMinMaxAverage is blocked until all responses have
  -- been received
  per getMinMaxAverage => card dom s2e >= max_stimuli;

  per IsFinished => #fin(logSysToEnv) > 0;

end EnvironmentTask

```

A.7 The Insert Address Class

```

class InsertAddress
  is subclass of EnvironmentTask

operations
  public InsertAddress: nat ==> InsertAddress
  InsertAddress (pno) == max_stimuli := pno;

  public HandleEvent: nat ==> ()
  HandleEvent (pev) == logSysToEnv(pev)
  post checkResponseTimes(e2s, s2e, 24000000000);

  public Run: () ==> ()
  Run () == start(self); --, VolumeKnobT);

  createSignal: () ==> ()
  createSignal () ==
    ( dcl num2 : nat := getNum();
      logEnvToSys (num2);
      RadNavSys`mmi.HandleKeyPress(2, num2) )

thread
  periodic (2000, 100, 1000, 0)
    (createSignal)

```



```
end InsertAddress
```

A.8 The Transmit TMC Class

```
class TransmitTMC
  is subclass of EnvironmentTask

operations
  public TransmitTMC: nat ==> TransmitTMC
  TransmitTMC (pno) == max_stimuli := pno;

  public HandleEvent: nat ==> ()
  HandleEvent (pev) == logSysToEnv(pev)
  post checkResponseTimes(e2s, s2e, 40000000000);

  public Run: () ==> ()
  Run () == start(self); --, TransmitTMCT);

  createSignal: () ==> ()
  createSignal () ==
    ( dcl num2 : nat := getNum();
      logEnvToSys(num2);
      RadNavSys`radio.HandleTMC(num2) )

thread
  periodic (4000, 400, 3910, 0)
    (createSignal)

end TransmitTMC
```

A.9 The Volume Knob Class

```
class VolumeKnob
  is subclass of EnvironmentTask
```



```

operations
  public VolumeKnob: nat ==> VolumeKnob
  VolumeKnob (pno) == max_stimuli := pno;

  public HandleEvent: nat ==> ()
  HandleEvent (pev) == logSysToEnv(pev)
  post checkResponseTimes(e2s, s2e, 22000000000);

  public Run: () ==> ()
  Run () == start(self); --, VolumeKnobT);

  createSignal: () ==> ()
  createSignal () ==
    ( dcl num2 : nat := getNum();
      logEnvToSys(num2);
      RadNavSys `mmi.HandleKeyPress(1, num2) )

thread
  periodic (1000, 50, 500, 0)
    (createSignal)

end VolumeKnob

```

A.10 The World Class

```

class World

types
  public perfddata = nat * nat * real

instance variables
  static public
  envTasks : map seq of char to EnvironmentTask := {|->};

operations
  addEnvironmentTask: seq of char * EnvironmentTask ==> ()
  addEnvironmentTask (pnm, penv) ==
    ( envTasks := envTasks munion { pnm |-> penv };
      penv.Run() );

```




```
public RunScenario1 : () ==> map seq of char to perpdata
RunScenario1 () ==
  ( addEnvironmentTask("VolumeKnob", new VolumeKnob(10));
    addEnvironmentTask("TransmitTMC", new TransmitTMC(10));
    return { name |-> envTasks(name).getMinMaxAverage()
            | name in set dom envTasks } );

public RunScenario2 : () ==> map seq of char to perpdata
RunScenario2 () ==
  ( addEnvironmentTask("InsertAddress",new InsertAddress(10));
    addEnvironmentTask("TransmitTMC", new TransmitTMC(10));
    return { name |-> envTasks(name).getMinMaxAverage()
            | name in set dom envTasks } );

end World
```

A.11 The Test Class

```
class Test

instance variables

mmi      : MMI           := new MMI();
radio    : Radio         := new Radio();
nav      : Navigation    := new Navigation();

traces

TT: let x in set {1,2,3}
    in
      ((mmi.HandleKeyPress(x,x) |
        mmi.UpdateScreen(x,x) |
        radio.AdjustVolume(x) |
        radio.HandleTMC(x) |
        nav.DatabaseLookup(x) |
        nav.DecodeTMC(x));
        EnvironmentTask`IsFinished())
```



end Test